Havis, Inc.
75 Jacksonville Road, PO Box 2099
Warminster, PA 18974
T 800-524-9900 F 215-957-0729
www.havis.com

INSTALLATION INSTRUCTIONS

C-TM-SEATMT

Universal Seat Mount Platform for Laptop Computers

TOOLS REQUIRED:

Ratchet Wrench and Socket Set
7/16" Open End Wrench
Phillips Screw driver

PARTS and MOUNTING HARDWARE:

QTY	DESCRIPTION	PART #
1	Seat Mount Backing Plate	CM002510
1	Ratchet Strap with Hooks	GSM20085

All other hardware comes already attached to seat mount assembly or with other optional parts.

C-TM-SEATMT
ASSEMBLY DRAWING

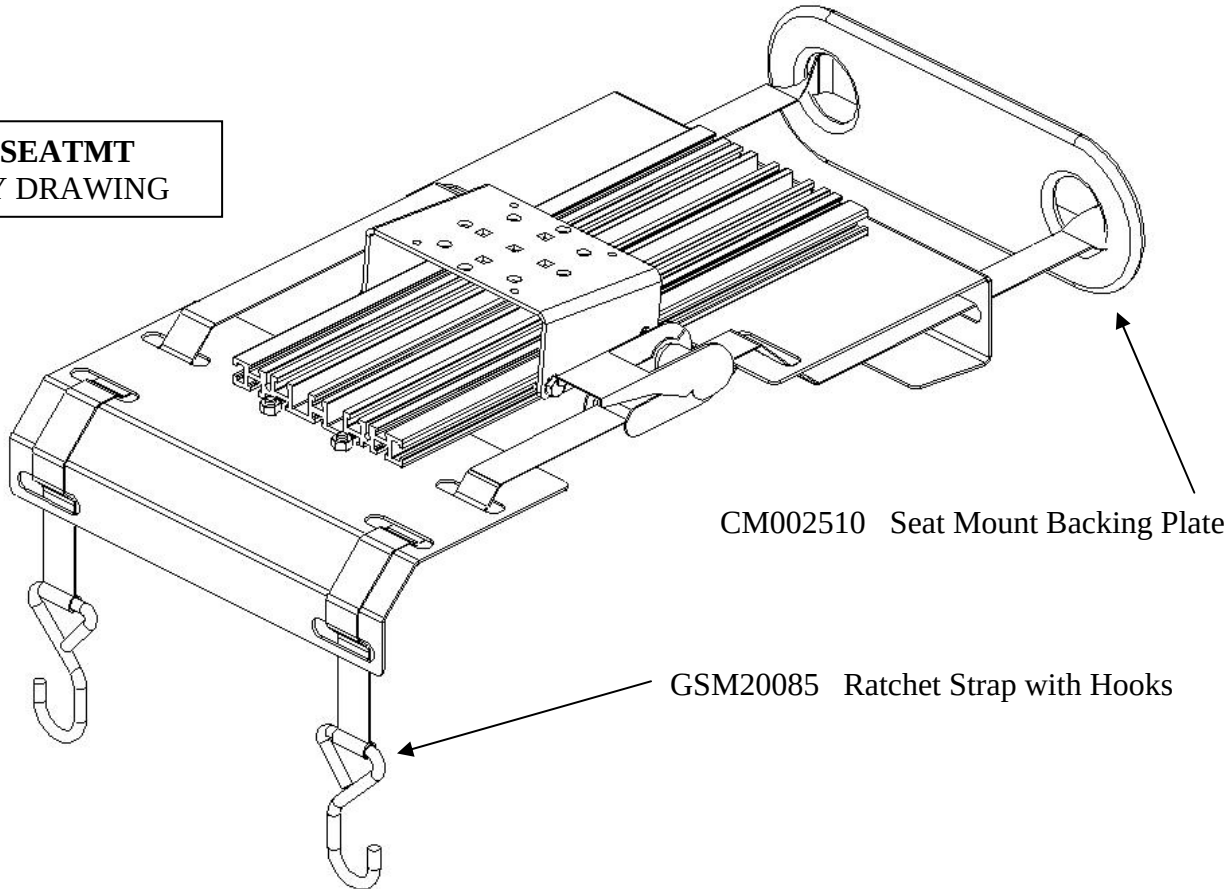

Always!

- Read all instructions before installing any Havis Inc, products.
- Use only hardware provided with install kit.
- For product support, visit the Install Instructions Section of our website at http://havis.com/Installation/Installation.html, email technicalsupport@havis.com or call 1-800-524-9900 and ask for technical support.

Havis, Inc.
75 Jacksonville Road, PO Box 2099
Warminster, PA 18974
T 800-524-9900 F 215-957-0729
www.havis.com

Assemble Strap with Hooks and Backing plate as shown in photo and / or drawing. Ratchet on passenger side works best.

Bolt LPS-XXX power supply to the bottom of Docking Station and attach Dock to seat mount assembly with C-MD-202 Tilt Swivel. Parts sold separately.

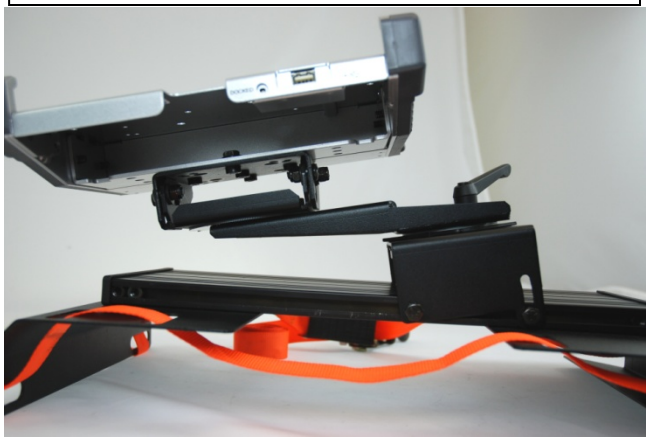

Docking Station with optional C-HDM-303 and C-MD-202 shown.

Before attaching additional parts, place the main assembly on the seat top. Adjust the rear plate so it is against the seat back.
Adjust the forward plate so it wraps closely over the front of seat pad.

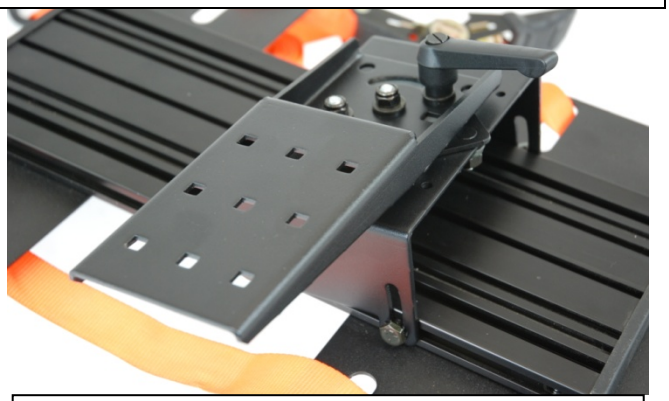

Note: An optional offset adaptor can be used to position computer closer to center of vehicle. C-HDM-303 shown.

Place Seat Mount assembly on seat and slip the backing plate through the gap between the seat back and seat pad.

Havis, Inc.
75 Jacksonville Road, PO Box 2099
Warminster, PA 18974
T 800-524-9900 F 215-957-0729
www.havis.com

Position backing plate so it will not pull back through the front of seat.

Attach both hooks underneath the seat to a sturdy location.
Do NOT attach to moving parts or wires.

Pull strap slack through ratchet mechanism and tighten the ratchet so the platform is firmly attached to seat.

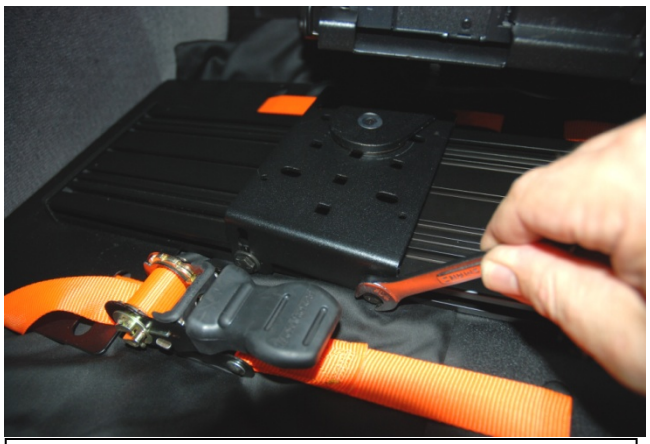

Adjust brackets to position the computer in the desired location.

Plug power cable into the 12 volt power source.

NOTE: A towel between the seat and seat mount platform will protect the seat.

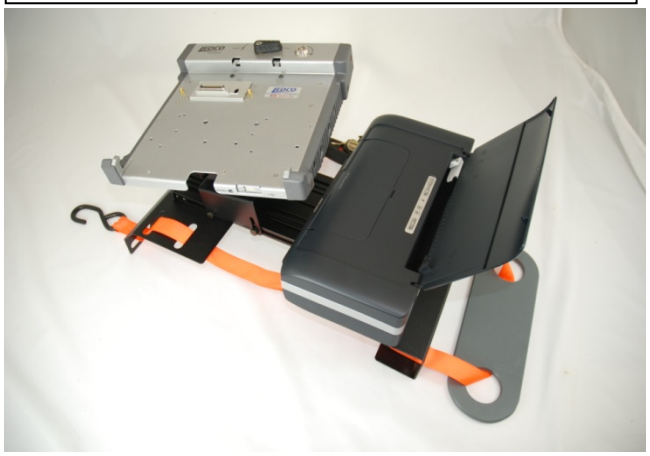

This platform can accommodate an optional printer mount.